

Greenmood[®]

Biophilic Design



Brickx

Product Specification Sheet

Connect with Greenmood



Brickx

Acoustic Cork Tile



Greenmood®

Geometric rhythm, natural balance

Brickx is a modular cork panel inspired by the structure of brick walls. Its sculptural relief plays with angles and voids, creating patterns full of depth and character.

Design by: Alain Gilles

Specifications



Sound absorption

Class E – NRC 0.2 (ISO 11654:1997), certified by accredited labs in Belgium



Fire classification

Burns without flame or toxic emissions. Withstands -180°C to $+120^{\circ}\text{C}$ (-292°F to 248°F).



Thermal Insulation

Biocompatible insulator with zero deterioration, resistant to pests, mold & bacteria.



Conditions of use

Indoor only – 40% to 80% RH recommended, avoid direct sunlight, direct water or heat exposure



Hypoallergenic

Dust-free, allergen-free, safe for asthma sufferers.



Durable


Stable, compressive-resistant, vapor-permeable. Not affected by rodents or chemical agents.



Gross weight

1.55kg (3.4 lbs) (Prism 10gr/0.02 lbs)

Acoustic performance

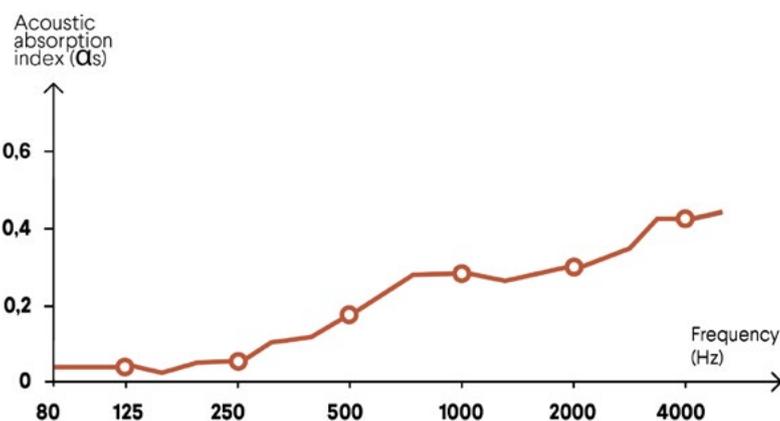

Brickx tiles are tested according to **ISO 11654:1997** by a certified lab in the Netherlands.

Sound absorption class: **E NRC: 0.2**

Color range

Made from 100% natural cork, with no additives or chemical treatments.


Natural



Dark



Dimensions

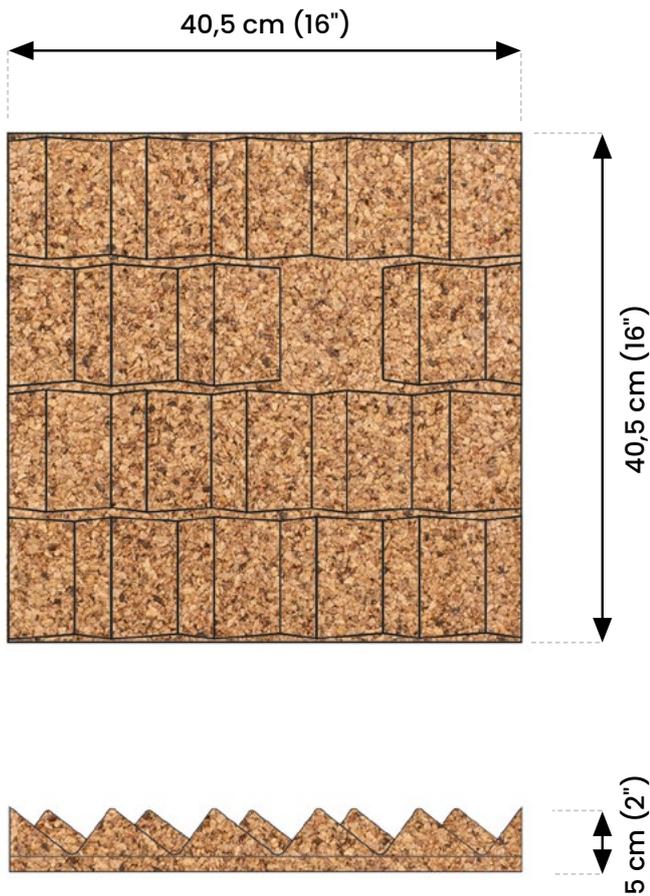

 1.55 kg (3.4 lbs)

Composition

92% cork granules

Granulometry TYPE POWDER + granules 1 - 2 mm.
Ground, purified and dried cork oak bark

8% BioCol Bs 30

Polyurethane polymer, suitable for food contact

Manufacturing process

Compression molding

Does not contain

- Pentachloropenol
- Tetrachloropenol
- Formaldehyd
- Cadmium
- Colorants AZO
- Chromo VI

Disclaimer

As a 100% natural material, each cork tile is absolutely unique. Slight color and thickness differiations may occur.

After installation, in some parts, points of junction might be visible.